


CMMsolid

Remote Display for the CMLsolid Charge Controller

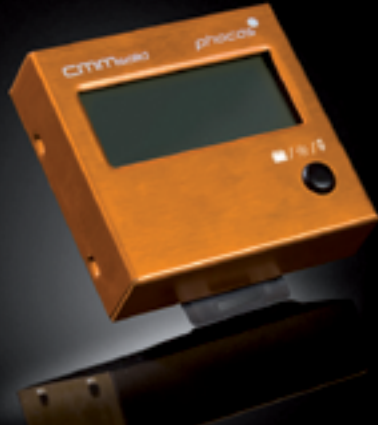

- Displays panel current, load current, and battery voltage
- Large three-digit display
- One push button
- Three LEDs help indicate which value is displayed by LCD
- DIN rail adapter for wall mounting

The Phocos CMMsolid has been designed to measure and display the actual values of your PV system such as panel current, load current, and battery voltage.

The CMMsolid can be used in combination with the Phocos CMLsolid 30 A charge controller.

Type	CMMsolid
Voltage range	0 to 35 V
Current range	0 to 30 A
Ambient temperature	-20 to +50 °C
Connection	Over standard RJ connection cable
Length of connecting cable	2 m
Dimensions of interface (WxHxD)	84 x 44 x 32 mm
Dimensions of display (WxHxD)	72 x 68 x 29 mm
Weight (interface + display)	195 g (with connecting wire)
Type of protection	IP22

Please note: This display is to be used with CMLsolid charge controller only.